


LED

**438
HUMBLE**

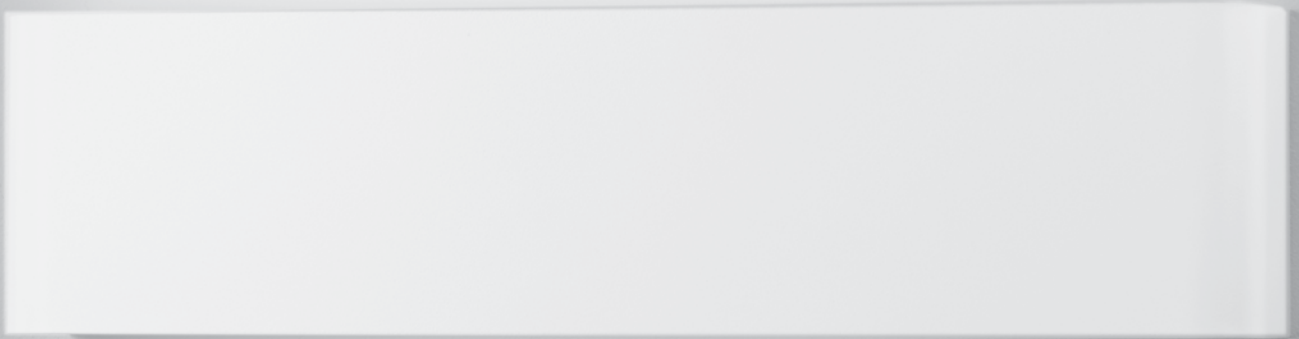

A curved housing surrounds a fluorescent or an LED source for true simplicity.
The Prismatic bottom diffuser reduces glare making this unit ideal for hallways or vanities.

Indessa
LIGHTING

438 HUMBLE

LED

TYPE


PROJECT: _____

LOCATION: _____

FEATURES

- Versatile up/down luminaire available in a horizontal mount orientation. Ideal for vanities and hallways.
- Simple design makes the unit extremely efficient.
- Bottom lens standard. Top open for maximum efficiency.
- Available in a wide variety of LED lumen packages.
- Standard 0-10V dimming driver.
- Meets all ADA requirements.
- Manufactured in the USA.

DIMENSIONS

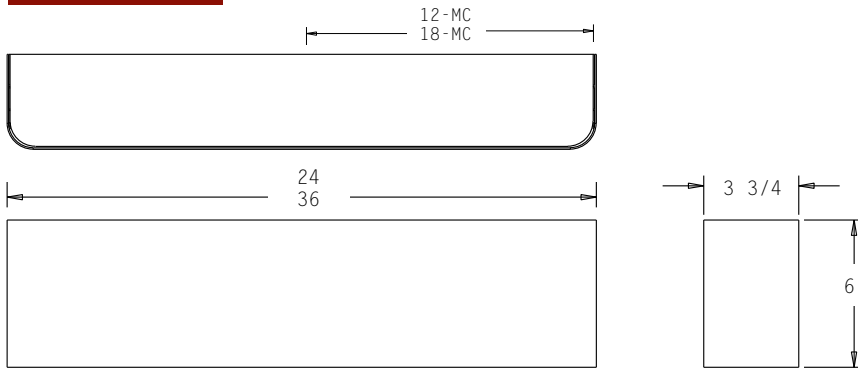

MC = Mounting Center
A 4" octagonal junction box should be used for installation.

ORDERING INFORMATION / OPTIONS EXAMPLE: 438-2LED14-WHT-24"

438

MODEL
438- Humble

LAMP

24" Version
2LED9 – 18w LED 2200 Lumens
2LED14 – 28w LED 3100 Lumens
1F17 – (1) 17w T8 Lamp
2F17 – (2) 17w T8 Lamps
2F14 – (2) 14w T5 Lamps

HOUSING FINISH

WHT - White
BLK - Black
SAL - Silver
BRZ - Bronze
Consult factory for other finishes.

36" Version
2LED9 – 18w LED 2200 Lumens
2LED14 – 28w LED 3100 Lumens
1F25 – (1) 25w T8 Lamp
2F25 – (2) 25w T8 Lamps
2F21 – (2) 21w T5 Lamps

OPTIONS

DL - Damp Label
TL - Top Lens
30K - 3000 Kelvin Temperature
35K - 3500 Kelvin Temperature
40K - 4000 Kelvin Temperature
IEM - Integral Emergency Driver

LENGTH

24"-24"
 36"-36"