

LED

546
BRAVO



Simplistic in design, this luminaire will not overpower the space while providing an exceptional amount of light. The ability to customize the length, at a reasonable price, makes this fixture perfect for entrances or lobbies.

Indessa
LIGHTING

546 BRAVO

LED

TYPE




PROJECT: _____

LOCATION: _____

FEATURES

- Simple rectilinear wet location wall sconce.
- Highly efficient fixture provides years of trouble free operation.
- Solid top restricts upward light pollution.
- Available in longer lengths.
- Standard 0-10V dimming driver.
- Meets all ADA requirements.
- Wet location listed.
- Manufactured in the U.S.A.

DIMENSIONS

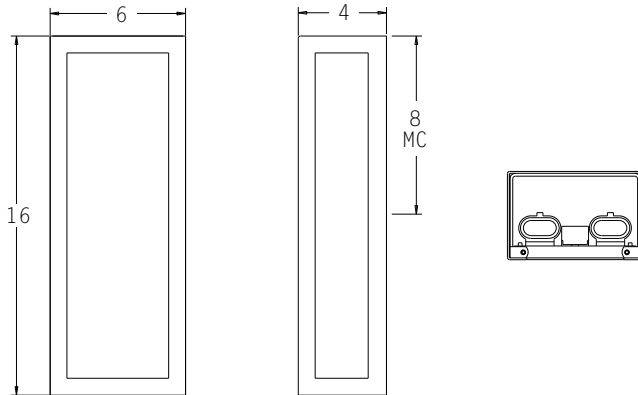

MC = Mounting Center

A 4" octagonal junction box should be used for installation.

ORDERING INFORMATION / OPTIONS

EXAMPLE: 546-2CFQ26-BRZ-BL

546

MODEL

546 - Bravo

LAMP

1LED9 - (1) 9W LED MODULE. 1100 Lumens
1LED14 - (1) 14W LED MODULE. 1550 Lumens
1LED19 - (1) 19W LED MODULE. 2000 Lumens
2CFQ13 - (2) 13W QUAD TUBE CF (G24Q-1 BASE)
2CFQ18 - (2) 18w QUAD TUBE CF (G24Q-2 Base)
2CFQ26 - (2) 26w QUAD TUBE CF (G24Q-3 Base)

Consult factory for other available lamps and LED Wattages.

FINISH

WHT - White
BLK - Black
SAL - Silver
BRZ - Bronze

Consult factory for other finishes.

OPTIONS

BL - Bottom Lens
BC - Bottom Cover
30K - 3000 Kelvin Temperature
35K - 3500 Kelvin Temperature
40K - 4000 Kelvin Temperature
IEM - Integral Emergency Driver
 (BC option cannot be used in conjunction with IEM)

Indessa
LIGHTING

PHONE: 509.924.0243 • FAX: 509.924.2607 • www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

