

# 669 Aspire II

Project: \_\_\_\_\_


Location: \_\_\_\_\_

Catalog Number	MODEL	LENGTH	SOURCE/WATTS	FINISH	LENS	OPTION(S)
Example: 669-24LED14-BRZ-35K	669	-	-	-	-	-



### Features:

- Solid aluminum frame and endcaps highlight this classic design
- Brushed aluminum or powder coated finishes available
- Offered in a wide variety of lumen packages
- Standard 0-10V dimming driver
- Suitable for wet locations
- Meets all ADA requirements
- Manufactured in the USA

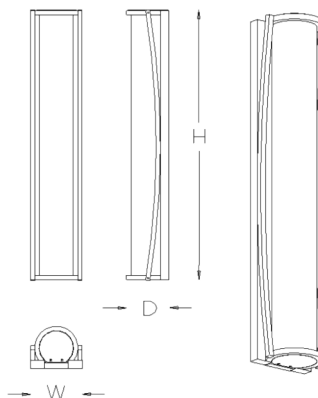

Dimensions		
Width	Height	Depth
4.5"	24"	3.75"
4.5"	48"	3.75"

Produced in 24" and 48" lengths, this compact column provides a stunning accent to the exterior of any building. With a variety of finishes available, this fixture will compliment any building style.

### Ordering Information/Options

Length	Source/watts			Finishes		Options	
24	LED14	1500 Lumens		MVOLT	WHT	White	30K
	LED20	2000 Lumens	BLK		Black	35K	3500 Kelvin Temperature
	LED24	2500 Lumens	SAL		Silver	40K	4000 Kelvin Temperature
48	LED14	2000 Lumens	MVOLT	BRZ	Bronze	TL	Top Lens
	LED20	2800 Lumens		BA	Brushed Aluminum	BL	Bottom Lens
	LED24	3500 Lumens		IEM	Integral Emergency Pack		

**Indessa**  
Lighting

PHONE: 509.924.0243 FAX: 509.924.2607 www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

