

Available in LED

508
LARGE SCALE
CLASSIC




This large scale unit in the Classic series is ideal for higher mounting locations. Available in a high lumen Compact Fluorescent or a Metal Halide source, the fixture is perfect for frigid climates.

Indessa
LIGHTING

508 LARGE SCALE CLASSIC

Available in LED

TYPE

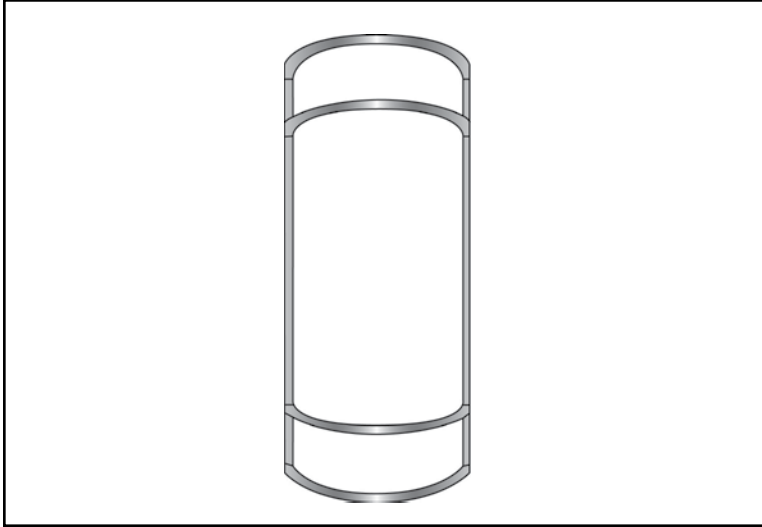


PROJECT: _____

LOCATION: _____

FEATURES

- Large solid aluminum bar fixture is ideal for larger spaces.
- Solid aluminum bar stock for maximum rigidity and strength.
- Available in METAL HALIDE.
- Electronic multi-volt (120 to 277V) ballast is standard.
- Meets all ADA requirements.
- Wet location listed.
- Manufactured in the U.S.A.

DIMENSIONS

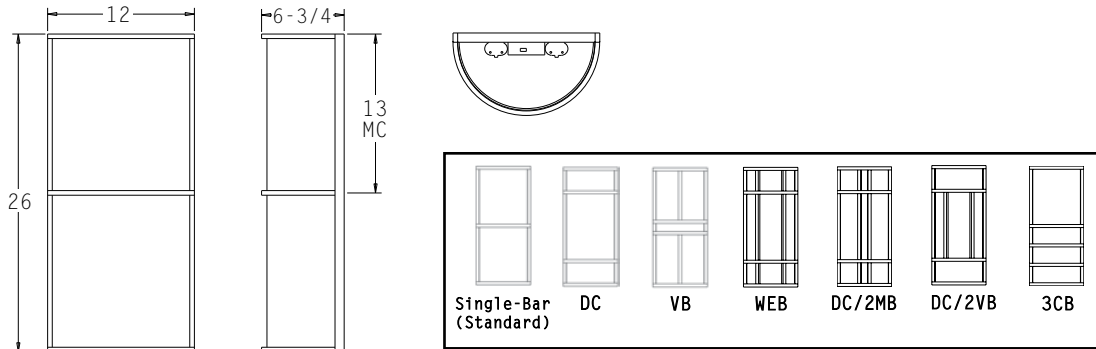

MC = Mounting Center
A 4" octagonal junction box should be used for installation.

ORDERING INFORMATION / OPTIONS EXAMPLE: 508-2CFQ26-BRZ-VB

508

MODEL

508 - Large Scale Classic

FINISH

- WHT** - White
 - BLK** - Black
 - SAL** - Silver
 - BRZ** - Bronze
 - BA** - Brushed Aluminum
- Consult factory for other finishes.*

OPTIONS

- BL** - Bottom Lens
 - TC** - Top Flat Aluminum Cover (No up light)
 - BC** - Bottom Flat Aluminum Cover (No bottom light)
 - IEM** - Integral Emergency Ballast (CF Only)
- Lamp** - Lamp provided, please specify color temperature.

LAMP

- | | |
|---|--|
| 2CFQ13 - (2) 13w QUAD TUBE CF (G24Q-1 Base) | 2LED14 - (2) 14W LED MODULES. 3100 Lumens |
| 2CFQ18 - (2) 18w QUAD TUBE CF (G24Q-2 Base) | 2LED17 - (2) 17W LED MODULES. 3750 Lumens |
| 2CFQ26 - (2) 26w QUAD TUBE CF (G24Q-3 Base) | 2F27 - (2) 24/27w Long Twin Tube CF (2G11 Base) |
| 2CFT26 - (2) 26w TRIPLE TUBE CF (GX24Q-3 Base) | 1F40 - (1) 40w Long Twin Tube CF (2G11 Base) |
| 2CFT32 - (2) 32w TRIPLE TUBE CF (GX24Q-3 Base) | 2F40 - (2) 40w Long Twin Tube CF (2G11 Base) |
| 2CFT42 - (2) 42w TRIPLE TUBE CF (GX24Q-3 Base) | 1MH50 - (1) 50w Metal Halide (ED17 Bulb) |
| 1LED17 - (1) 17W LED MODULE. 1875 Lumens | 1MH70 - (1) 70w Metal Halide (ED17 Bulb) |
| 1LED19 - (1) 19W LED MODULE. 2200 Lumens | <i>Consult factory for other available lamps and LED Wattages.</i> |

BAR CONFIGURATION

- Blank** - Standard Single-Bar Design
- DC** - Double Cross Bar
- VB** - Vertical Bar
- WEB** - Double Cross Bar w/ 2 Full Vertical Bars
- DC/2MB** - Double Cross Bar w/ 2 Middle Bars
- DC/2VB** - Double Cross Bar w/ 2 Vertical Bars
- 3CB** - 3 Lower Cross Bars